

Ellipse Series

GNSS-aided Inertial Navigation Systems

Ellipse-N/D

MADE IN FRANCE



Compact and Robust Inertial Sensors for Reliable Navigation



No Export
Restriction



2-year
Warranty



Vehicle Positioning



Autonomous Navigation



Motion Monitoring
& compensation

The Ellipse INS series combines Inertial Measurement Unit (IMU) with GNSS and external sensors using our advanced **fusion** algorithm, delivering accurate **position** and **orientation**, even in challenging environments.



Robust L1/L2
RTK capable

ARDUPILOT

ROS *pixhawk*

Compatible drivers



Vibration resilient



Built-in
magnetometer

Reliability
& Robustness



Auto-adjusting
heave



External sensors
input







Dead reckoning
capable



Spoofing & Jamming mitigation
OSNMA capable

Specifications

VERSIONS Box version are IP68, resistant to dust and water. OEM version are PCB mounted for tight integration.

	Ellipse-N		Ellipse-D	
	Box 	OEM 	Box 	OEM 
Dual-antenna heading	✗	✗	✓	✓
Dimensions	46 x 45 x 24 mm	29.5 x 25.5 x 16 mm	46 x 45 x 32 mm	29.5 x 25.5 x 16 mm
Weight	47 g	17 g	65 g	17 g

SYSTEM PERFORMANCE

1-sigma error over the full temperature range for a typical land application

Correction	Single point	RTK	PPK ⁽¹⁾
Roll / Pitch	0.1°	0.05°	0.03°
Heading	0.2°	0.2°	0.1°
Horizontal position	1.2 m	0.01 m	0.01 m

⁽¹⁾ Using Qinertia post processing software

SENSORS

	Accelerometers	Gyroscopes	Magnetometers
Measurement range	Marine: 8 g Land/Air: 20 g High dynamics: 40 g	Marine: 450°/s Land/Air: 450°/s High dynamics: 1000°/s	50 Gauss
In run bias instability	14 µg	7°/h	1.5 mGauss

INTERFACES

Aidings	GNSS, RTCM, Odometer, DVL, Magnetometers, Air data
Protocols	NMEA, sbgEcom (binary), REST API, third party protocols
Output rate	1 kHz (IMU & INS)
Main Serial Interface	RS-232, RS-422, USB – up to 2 Mbps
CAN interface	CAN 2.0 A/B – up to 1 Mbps
Sync I/O	2x Sync inputs (RS232), 1x Sync output (TTL)

LONG GNSS OUTAGE PERFORMANCE⁽¹⁾

Application	Position accuracy
Land	0.5% travelled distance
Marine	1.0% travelled distance
Airborne	2.0% travelled distance

⁽¹⁾ With external aiding inputs. Test report available upon request.

HEAVE PERFORMANCE Marine version

Accuracy	5 cm or 5%	Whichever is greater
Wave period	0 to 20 s	Auto-adjusting

INTERNAL GNSS


Features	RAW, OSNMA, PointPerfect (SPARTN/RTCM), SBAS
Signals	GPS: L1C/A, L2C GALILEO: E1, E5b GLONASS: L1OF, L2OF BEIDOU: B1/B2
Time to first fix	< 24 s (cold start)
Jamming / Spoofing	Mitigation & advanced indicators

ELECTRICAL & ENVIRONMENTAL

Input voltage	5 - 36 VDC
Power consumption	N ⁽¹⁾ : < 600 mW, D ⁽¹⁾ : < 900 mW
Operating temperature	-40 to 85 °C
Shock limit	500 g / 0.1 ms
Operating vibration	8 g RMS (20 Hz to 2 kHz per MIL-STD 810G)
MTBF	218,000 hours

⁽¹⁾ Without GNSS antenna

FUNCTIONAL BLOCK DIAGRAM

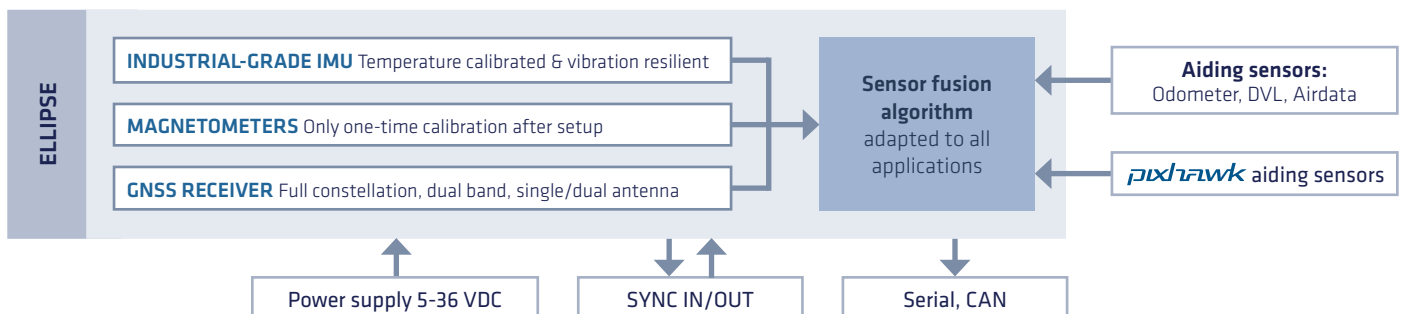

Free Technical Support

Lifetime Firmware Updates

2-year Warranty

